




6002 Chemical Hose

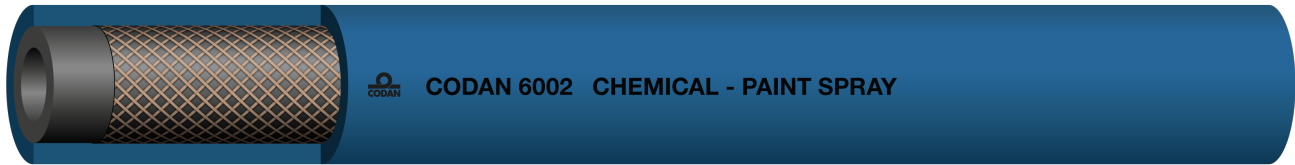

DESCRIPTION

Blue, smooth, flexible, lightweight pressure hose with anti-static, charge-eliminating inner rubber layer. For use in car paint shops, paint cabins, paint guns, etc. Resistant to chemicals and solvents. Ideal for nitro lacquer. The hose must be flushed with solvent before use. Silicone-free surface ensures problem-free painting. For maximum safety, please consult the chemical resistance list. Normally installed using brass fittings, and either hose clamps or crimped-on low-pressure fittings.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	6001
Application	Chemical hose, Paint Spray
Standard length	50 metres
Working temp.	-40°C to 100°C
Inside compound	EPDM
Inside colour	Black
Outside compound	EPDM
Outside colour	Blue
Reinforcement	PVA
Standards	-
Std. branding	-

Inside dia.(mm)	Outside dia.(mm)	Pressure (BAR)	Burst (BAR)	Bend Radius	Weight (g/m)	Product code
6,0	12,4	20	60	40	127	600106000
9,0	16,0	20	60	50	188	600109000
11,0	18,0	20	60	55	218	6001011000
13,0	21,0	20	60	60	247	6001013000
16,0	24,0	20	60	75	342	6001016000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

© Codan Rubber Danmark A/S Valdemarshaab 1, DK-4600 Køge, Denmark Tel. +45 56 64 64 64
Fax +45 56 64 65 48 Mail: info@codan.com www.codan.com

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.

[End of life evaluation for production of Rubber hoses with Textile reinforcement](#)

16-05-2026