




8035 Food Hose

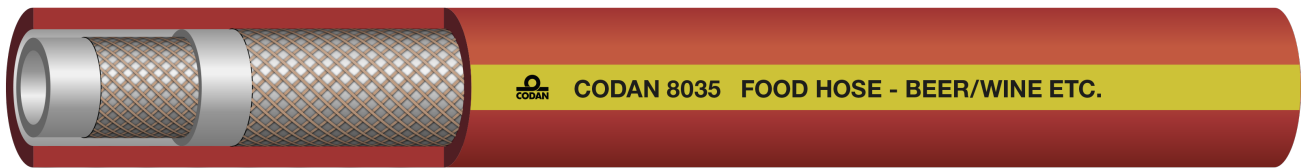

DESCRIPTION

Red, wrapped, high quality pressure hose with special compound outer coating which ensures that the hose is exceptionally hard-wearing and weather resistant. Mainly for use in breweries as flexible connection between pipelines and tanks or tankers.
Capable of withstanding brief periods of high temperature (120Å°C) during flushing/cleaning.

Normally installed using stainless crimped-on fittings, hose clamps or clamp fittings.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	8035
Application	Beer, Wine etc.
Standard length	40 metres
Working temp.	-40°C to 85°C
Inside compound	EPDM
Inside colour	White
Outside compound	EPDM
Outside colour	Red
Reinforcement	Polyester
Standards	FDA
Std. branding	-

Inside dia.(mm)	Outside dia.(mm)	Pressure (BAR)	Burst (BAR)	Bend Radius	Weight (g/m)	Product code
13,0	25,0	10	30		530	8035013000
16,0	28,0	10	30		620	8035016000
19,0	31,0	10	30		690	8035019000
25,0	38,0	10	30		880	8035025000
30,0	43,0	10	30		1030	8035030000
32,0	45,0	10	30		1090	8035032000
35,0	48,0	10	30		1160	8035035000
38,0	51,0	10	30		1250	8035038000
40,0	53,0	10	30		1300	8035040000
45,0	59,0	10	30		1630	8035045000
51,0	66,0	10	30		1820	8035051000
55,0	70,0	10	30		1960	8035055000
60,0	75,0	10	30		2100	8035060000
63,0	78,0	10	30		2190	8035063000
70,0	86,0	10	30		2640	8035070000
76,0	92,0	10	30		2830	8035076000
80,0	96,0	10	30		3000	8035080000
89,0	105,0	10	30		3270	8035089000
90,0	106,0	10	30		3300	8035090000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.

[End of life evaluation for production of Rubber hoses with Textile reinforcement](#)

Inside dia.(mm)	Outside dia.(mm)	Pressure (BAR)	Burst (BAR)	Bend Radius	Weight (g/m)	Product code
102,0	118,0	10	30		3790	8035102000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

© Codan Rubber Danmark A/S Valdemarshaab 1, DK-4600 Køge, Denmark Tel. +45 56 64 64 64
 Fax +45 56 64 65 48 Mail: info@codan.com www.codan.com

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.

[End of life evaluation for production of Rubber hoses with Textile reinforcement](#)

17-05-2026