




8038 Food Hose

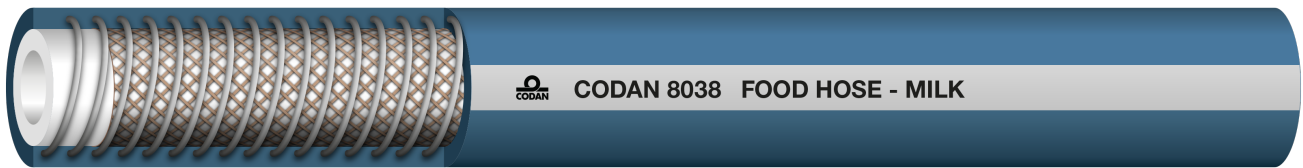

DESCRIPTION

Blue, wrapped suction/pressure hose with two helixwires. For hot and cold beverages, e.g. beer, wine, fruit juice and milk. Resistant to most vegetable and animal oils. It is recommended that new hoses be flushed with hot 5% soda solution before use. Flushing after use is also recommended. Brief cleaning: +120Å°C. Normally installed using stainless DIN clamps or stainless hose clamps tightened with Allen key.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	8038
Application	Food hose, Milk
Standard length	40 metres
Working temp.	-20°C to 90°C
Inside compound	NBR/SBR
Inside colour	White
Outside compound	CR
Outside colour	Blue
Reinforcement	Polyester w/ double steel helix
Standards	FDA
Std. branding	-

Inside dia.(mm)	Outside dia.(mm)	Pressure (BAR)	Burst (BAR)	Bend Radius	Weight (g/m)	Product code
25,0	35,0	10	30	80	730	8038025000
32,0	42,4	10	30	100	910	8038032000
38,0	49,0	10	30	120	1160	8038038000
40,0	51,6	10	30	130	1200	8038040000
42,0	53,6	10	30	150	1260	8038042000
45,0	56,6	10	30	160	1320	8038045000
51,0	62,0	10	30	200	1550	8038051000
54,0	65,6	10	30	220	1690	8038054000
60,0	72,0	10	30	240	2050	8038060000
63,0	76,0	10	30	250	2160	8038063000
76,0	90,0	10	30	300	2750	8038076000
89,0	105,0	10	30	330	3700	8038089000
102,0	116,4	10	30	400	6280	8038102000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

© Codan Rubber Danmark A/S Valdemarshaab 1, DK-4600 Køge, Denmark Tel. +45 56 64 64 64
Fax +45 56 64 65 48 Mail: info@codan.com www.codan.com

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.

[End of life evaluation for production of Rubber hoses with Textile reinforcement](#)

16-05-2026