




# 1243 Material Handling Hose

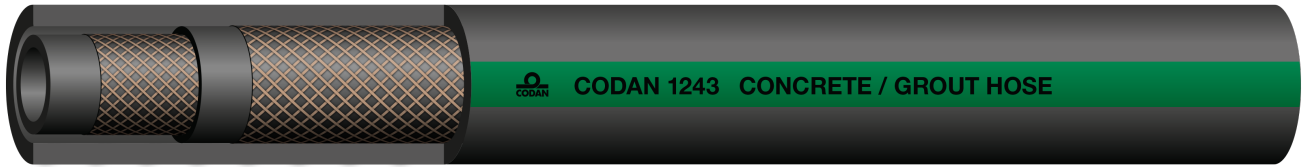

## DESCRIPTION

Black, wrapped pressure hose with very sturdy, extra hard-wearing, anti-static inner rubber layer that ensures long service life. Weather-resistant, hard-wearing outer rubber layer. For use in the construction industry for injecting wet grout, mixed concrete and other wet, abrasive materials. Also suitable for plaster, etc.

Please contact Codan for further information.

## ADDITIONAL INFORMATION

Type no.	1243
Application	Concrete / Grout Hose
Standard length	40 metres
Working temp.	-20°C to 70°C
Inside compound	NR
Inside colour	Black
Outside compound	SBR
Outside colour	Black
Reinforcement	Polyester
Standards	-
Std. branding	-

Inside dia.(mm)	Outside dia.(mm)	Pressure (BAR)	Burst (BAR)	Bend Radius	Weight (g/m)	Product code
19,0	31,5	40	140	∞	655	1243019000
25,0	38,2	40	140	∞	810	1243025000
32,0	46,0	40	140	∞	1300	1243032000
35,0	49,4	40	140	∞	1390	1243035000
38,0	53,6	40	140	∞	1440	1243038000
51,0	68,6	40	140	∞	2100	1243051000
63,0	85,4	40	140	∞	3270	1243063000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

© Codan Rubber Danmark A/S Valdemarshaab 1, DK-4600 Køge, Denmark Tel. +45 56 64 64 64  
Fax +45 56 64 65 48 Mail: info@codan.com www.codan.com

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.

[End of life evaluation for production of Rubber hoses with Textile reinforcement](#)

08-03-2026