




3006 Oil Hose

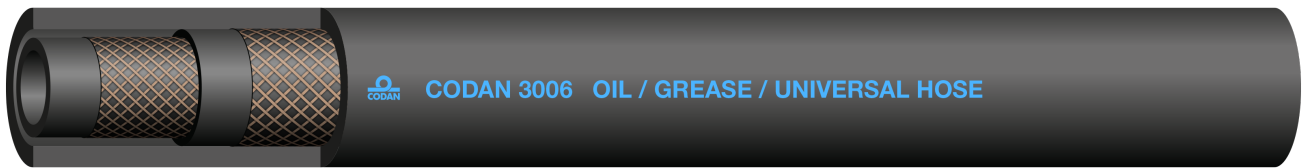

DESCRIPTION

Black, flexible, anti-static pressure hose for oil. A classic oil hose for all-round industrial use, e.g. diesel, paraffin, grease and other oil-based media. Extremely hard-wearing, weather and ozone-resistant, self-extinguishing outer CR rubber coating. Normally installed using hose clamps, but clamp or screw fittings can also be used. Note! Care must be taken to avoid damaging the yarn insert.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	3006
Application	Oil / Grease / Universal
Standard length	50 metres
Working temp.	-40°C to 100°C
Inside compound	NBR
Inside colour	Black
Outside compound	Polyester
Outside colour	Black
Reinforcement	-
Standards	-
Std. branding	-

Inside dia.(mm)	Outside dia.(mm)	Pressure (BAR)	Burst (BAR)	Bend Radius	Weight (g/m)	Product code
6,3	14,3	20	80	20	191	3006006000
7,9	15,9	20	80	25	221	3006008000
9,5	17,5	20	60	60	250	3006010000
12,7	21,5	20	60	50	350	3006013000
15,9	24,7	20	60	70	417	3006016000
19,1	29,5	15	50	90	588	3006019000
22,3	33,1	15	50	100	694	3006022000
25,4	36,2	15	50	120	770	3006025000
32,0	42,0	15	45	220	920	3006032000
38,0	48,0	15	45	250	1060	3006038000
51,0	61,0	15	45	350	1340	3006051000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.