




1518 Steam Hose

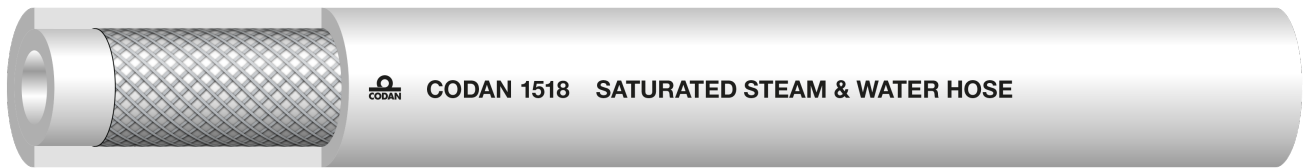

DESCRIPTION

White, wrapped hose designed for low-pressure steam and hot water.
For industrial cleaning in dairies, slaughterhouses, laundries, etc.
When used for steam, it is recommended that one hose end remains open.

Please contact Codan for further information.

ADDITIONAL INFORMATION

Type no.	1518
Application	Saturated Steam and Water
Standard length	40 metres
Working temp.	-30°C to 170°C
Inside compound	EPDM
Inside colour	White
Outside compound	EPDM
Outside colour	White
Reinforcement	Polyester
Standards	-
Std. branding	-

Inside dia.(mm)	Outside dia.(mm)	Pressure (BAR)	Burst (BAR)	Bend Radius	Weight (g/m)	Product code
13,0	25,0	7	70	130	410	1518013000
16,0	28,0	7	70	160	470	1518016000
19,0	32,0	7	70	190	600	1518019000
25,0	38,0	7	70	250	740	1518025000
32,0	47,0	7	70	320	1007	1518032000
38,0	54,0	7	70	380	1340	1518038000
45,0	60,0	7	70	450	1460	1518045000
51,0	66,2	7	70	510	1590	1518051000
63,0	81,0	7	70	630	2425	1518063000
76,0	94,8	7	70	760	3100	1518076000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. The written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care, and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage of vulcanized Rubber Products).

© Codan Rubber Danmark A/S Valdemarshaab 1, DK-4600 Køge, Denmark Tel. +45 56 64 64 64
Fax +45 56 64 65 48 Mail: info@codan.com www.codan.com

The individual conditions of an application will affect the lifetime of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.

[End of life evaluation for production of Rubber hoses with Textile reinforcement](#)

16-05-2026